

FS500

FUME EXTRACTOR SWITCH

Reference Guide
English

FS500/FUME EXTRACTOR SWITCH

CONTAINS

FS500 FUME EXTRACTOR SWITCH



MANUAL



0780637



0269300




0009295



INSTALLATION

FUME EXTRACTOR
SWITCH
FS500

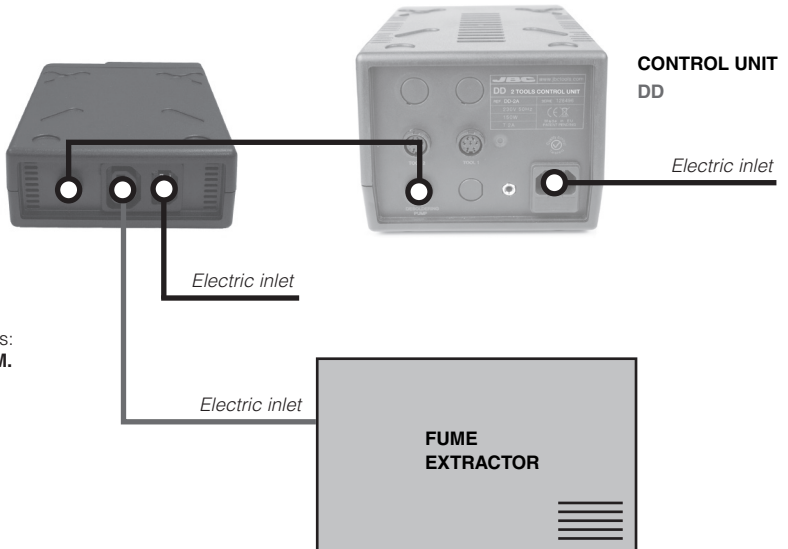

Compatible control units:
DI 2870, DI, DD and DM.

ELECTRIC FUME EXTRACTOR SWITCH ELEMENTS




SETTINGS

DI 2870 station is ready by default to use the FS500. With the stations DI, DD and DM it has to be activated using the Nitrogen mode found in the "station settings" menu of the control unit.

Press **SELECT** during 2 seconds to enter **SETTINGS**

ORIGINAL PIN: 0105

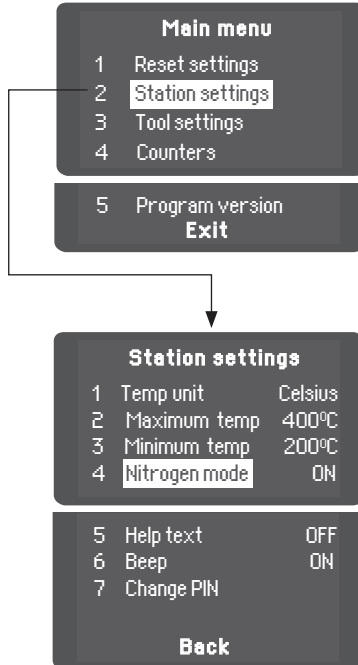

THECNICAL SPECIFICATIONS

- Supply: 24V.
- Power: 10W.
- Fuse: 5A
- Maximum power to connect 5A 250V~.
- Weight of complete unit: 450gr.
- Complies with CE standards on electrical safety, electromagnetic compatibility and ESD protected housing "skin effect".
- RoHS compliant.



This product should not be thrown in the garbage.

JBC

ENGLISH / WARRANTY

The JBC 2 years warranty, guarantees this equipment against all manufacturing defects, covering the replacement of defective parts and all necessary labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased enclosing this, fully filled in, sheet.

SERIAL N°

STAMP OF DEALER

DATE OF PURCHASE

MORE INFORMATION
www.jbctools.com