


DS/DV

DESOLDERING STATION

Quick start Guide
English

DS-DV/DESOLDERING STATION

CONTAINS

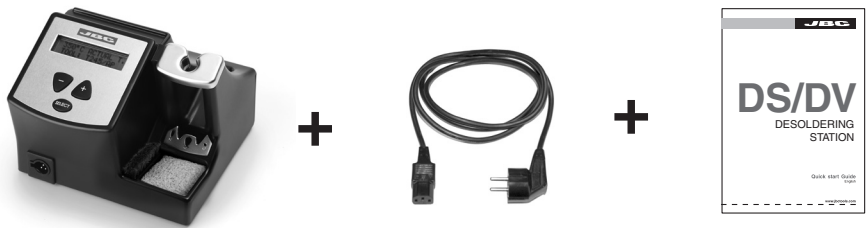


INSTALLATION / I.E.CONNEXION

DESOLDERING PUMP
MS-A

CONTROL UNIT
DS/DV

DESOLDERING STAND
DS-A

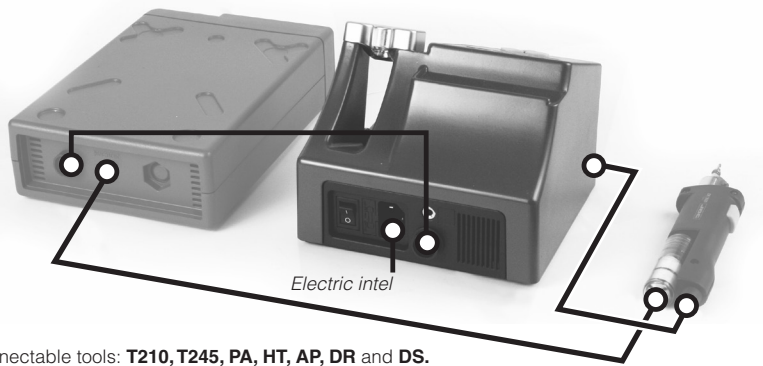

Connectable tools: **T210, T245, PA, HT, AP, DR** and **DS**.
Connectable modules: **MS, MV** and **MN**.


HEAT MANAGEMENT

The JBC stations intelligently manages the tool temperature:

Work status: When the tool is out of the stand, the working temperature is 350° C.

Sleep status: When the tool is on the stand, the temperature is being lowered to 220° C.

Hibernation status: During larger periods of inactivity i.e 30 minutes, the tool's power is being cut off and it cools down to room temperature.

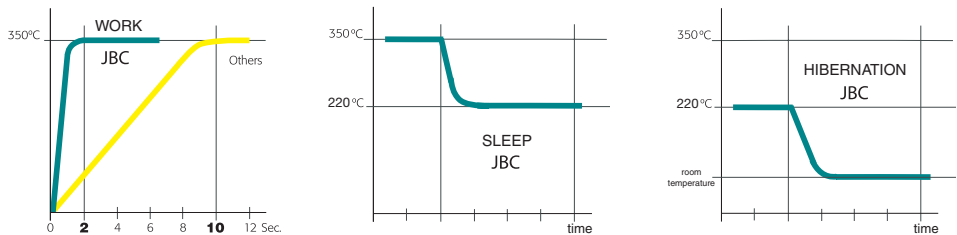

The advantages of this heat management is the lifespan increase which ensure low cost of ownership.

WORKING

Selected temperature

350°C ACTUAL T.
TOOL: 2245/AP

Working tool model

Decreases & move down



Increase & move up



SELECT

Selection

SETTINGS

Press **SELECT** during 2 seconds
to enter **SETTINGS**

ORIGINAL PIN: 0105

CHANGE STATION
PARAMETERS ±S
CHANGE TOOL
PARAMETERS ±S
COUNTERS READ
±S
RESET PARAMETERS
±S
EXIT SETUP
±S

Language?	ENGLISH	±S
Temperature Unit	CELSIUS/FAHRENHEIT	±S
Max. T=	[400°C]	
Min. T=	90°C	±S
Max. T=	[400°C]	
Min. T=	90°C	±S
Change PIN	YES/NO	±S
Save Changes?	YES/NO	±S

Tool Select	DS-A	±S
Fix Temp. Levels	OFF/ON	±S
Sleep Dealy Time	x MINUTES	±S
Sleep Temperat.	x °C/°F	±S
Hibernation	x MINUTES	±S
Temperat. Adjust	+/- xx °C/°F	±S
Save Changes?	YES/NO	±S

Total Hours	xxxxx	±S
Work Hours	xxxxx	±S
Sleep Hours	xxxxx	±S
Hibern. Hours	xxxxx	±S
Sleep Cycles	xxxxx	±S

THECNICAL SPECIFICATIONS

- Temperature selection from 320 to 450°C ($\pm 5\%$).
- Power: 40W.
- Safety transformer, mains separator and double isolation, with integrated temperature protection fuse.
- **DS/DV-2A** 230V control unit. Input: 230V 50Hz. Output: 24V.
- **DS/DV-1A** 120V control unit. Input: 120V 60Hz. Output: 24V.
- Total weight of unit: 2.5Kg.
- Complies with CE standards on electrical safety, electromagnetic compatibility and ESD protected housing "skin effect".
- RoHS compliant.
- Equipotential connector and the tool tip are connected to station mains ground supply for ESD protection.



This product should be
thrown in the garbage.

JBC

ENGLISH / WARRANTY

The JBC 2 years warranty, guarantees this equipment against all manufacturing defects, covering the replacement of defective parts and all necessary labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased enclosing this, fully filled in, sheet.

SERIAL N°

STAMP OF DEALER

DATE OF PURCHASE

MORE INFORMATION

www.jbctools.com

MANUFACTURED BY

JBC Industrias, S.A.

Ramón y Cajal, 3
08750 MOLINS DE REI
BARCELONA - SPAIN
Tel.: +34 93 325 32 00
Fax: +34 93 680 49 70

www.jbctools.com
info@jbctools.com