

JBC

www.jbctools.com

INSTRUCTION MANUAL



NT115


Nano Handle

This manual corresponds to the following references:

NT115-A

Packing List


The following items are included:



Nano Handle 1 unit

Manual 1 unit
Ref. 0029825

Connections

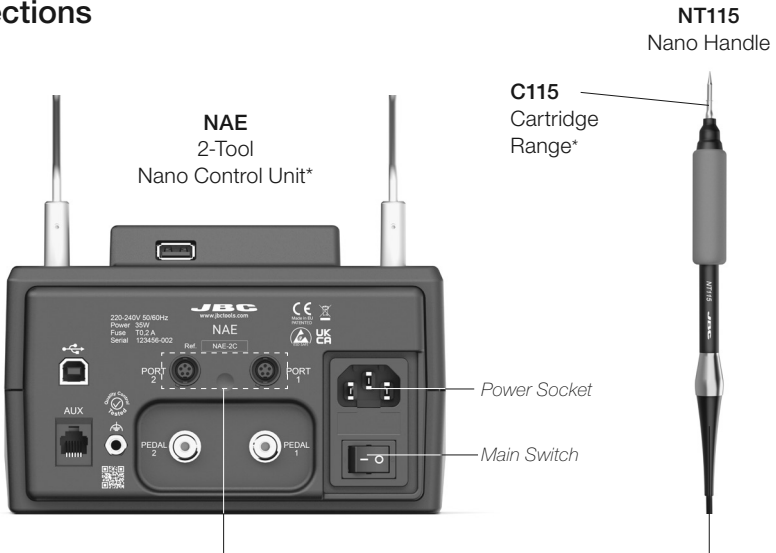

**Not included, sold separately.*

Changing Soft Foam Grips

Soft foam grips for nano handles ensure a better manual control of the handle and greater comfort when working.

Soft foam grips are available in 3 different colors:

N8662 *green*

Ref. 0018662 (incl. 4x grips)

N3308 *blue*


Ref. 0023308 (incl. 4x grips)

N3309 *black*

Ref. 0023309 (incl. 4x grips)


Replace the grips easily using the included fitters like shown in the following pictures.

Inserting Fitters




Insert the fitters into the new grip.

Assembling Grip



Push the grip with the fitters onto the nano handle.

Removing Fitters




To remove the fitters, hold the grip and pull the fitters out. Use pliers if necessary.


Assembling Rubber Grips

N6079 Rubber Grips for Nano Tools offer a pleasant and comfortable feel and facilitate the handling of any small or microscopic SMD component.


Remove the soft foam grip by pulling it off the handle, and then push the new rubber grip onto the handle.

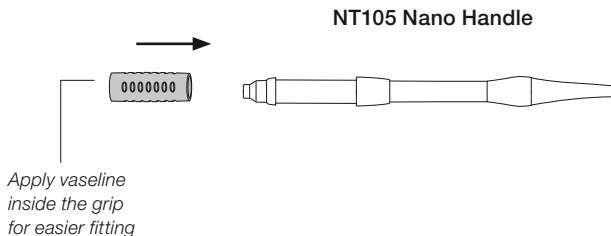

Removing Rubber Grips

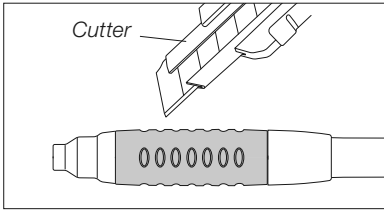

Make a lengthwise cut. ⚠ Be careful not to damage the handle.

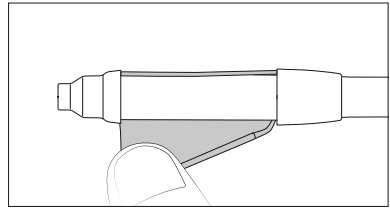


Remove the old grip.

Changing Cartridges


Save time and change cartridges safely without having to switch the station off.

Removing




Place the cartridge into the extractor slot (1) and pull the handle to remove the cartridge (2).

Inserting




Push the new cartridge into the handle up to the reference ring*.

Aligning




Use the holes to rotate the cartridges for proper alignment.




*Important

It is essential to insert the cartridges up to the reference ring for a proper connection.



Compatible Cartridges

The nano handle **NT115** works with **C115** cartridges. Find the model that best suits your soldering needs at www.jbctools.com.

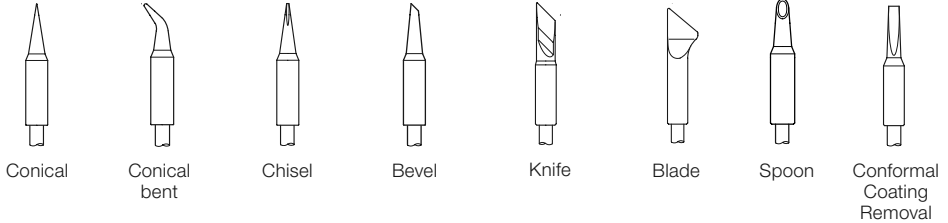

Safety



It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosion.

- Do not use the units for any purpose other than soldering or rework. Incorrect use may cause a fire.
- The power cord must be plugged into approved bases. Be sure that it is properly grounded before use. When unplugging it, hold the plug, not the wire.
- Do not work on electrically live parts.
- The tool should be placed in the stand when not in use in order to activate the sleep mode. The soldering tip or nozzle, the metal part of the tool and the stand may still be hot even when the station is turned off. Handle with care, including when adjusting the stand position.
- Do not leave the appliance unattended when it is on.
- Do not cover the ventilation grills. Heat can cause inflammable products to ignite.
- Avoid flux coming into contact with skin or eyes to prevent irritation.
- Be careful with the fumes produced when soldering.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid personal harm.
- Utmost care must be taken with liquid tin waste which can cause burns.
- This appliance can be used by children over the age of eight and also people with reduced physical, sensory or mental capabilities or lack of experience provided that they have been given adequate supervision or instruction concerning the use of the appliance and understand the hazards involved. Children must not play with the appliance.
- Maintenance must not be carried out by children unless supervised.

Specifications

NT115
Nano Handle
Ref. **NT115-A**

- | | |
|---|---|
| - Cable Length: | 120 cm / 47.24 in |
| - Total Net Weight: | 50.6 g / 0.112 lb |
| - Package Dimensions/Weight:
(L x W x H) | 237 x 42 x 42 mm / 94.5 g
9.33 x 1.65 x 1.65 in / 0.208 lb |

Complies with CE standards.
ESD safe.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labor.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.



www.jbctools.com