





NASE

2-Tool Nano Rework Station

This Plug & Play Guide corresponds to the following references:

Ref.

NASE-9C (100 V) NASE-1C (120 V) NASE-2C (230 V)

Station

More Information at the product web page



Video Guide

Watch the product video



Packing List

The following items are included according purchased station reference:













2-Tool Nano Control Unit 1 unit

Ref. NAE-9C (100 V) Ref. NAE-1C (120 V) Ref. NAE-2C (230 V)



Nano Handle 1 unit Ref. NT115-A



Ref. 0020952 includes: Ref. C115-101 x1 C115-103 x1 C115-107 x1 C115-112 x1

Ref. 0020953 includes: Ref. C115-105 x2 C115-113 x2







Cartridge


Installation

NAE 2-Tool Nano Control Unit





Installation

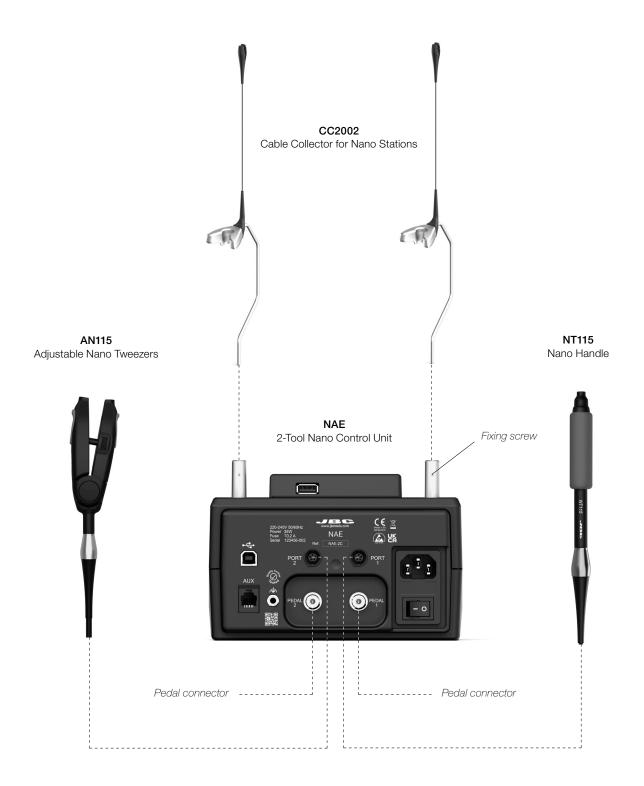

Specifications

NASE

2-Tool Nano Rework Station

Ref. **NASE-9C** (100 V) 50/60 Hz. Input fuse: 0.5 A. Output: 8.5 V. Ref. **NASE-1C** (120 V) 50/60 Hz. Input fuse: 0.5 A. Output: 8.5 V. Ref. **NASE-2C** (230 V) 50/60 Hz. Input fuse: 0.2 A. Output: 8.5 V.

- Package Dimensions / Weight:

 $(L \times H \times W)$

240 x 295 x 305 mm / 4.30 kg 9.45 x 11.61 x 12.01 in / 9.48 lb

Complies with CE standards.

ESD safe.



Warranty

Information regarding the warranty of each product can be found on the final page of its instruction manual.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.