



## WSB

### High-Temperature Wire Stripper Station

This Plug & Play Guide corresponds to the following references:

Ref.

**WSB-9B** (100 V)  
**WSB-1B** (120 V)  
**WSB-2B** (230 V)

#### Station

More Information at the  
product web page



## Packing List

The following items are included according purchased station reference:



**WS**  
**High-Temperature Wire Stripper**  
**Control Unit** ..... 1 unit  
 Ref. WS-9UA (100 V)  
 Ref. WS-1UA (120 V)  
 Ref. WS-2UA (230 V)

**WSBT**  
**Stand for WS440** ..... 1 unit  
 Ref. WSBT-B

**WS440**  
**High-Temperature Wire Stripper**  
**Tweezers** ..... 1 unit  
 Ref. WS440-B




**SCH**  
**Cartridge Holder** ..... 1 unit  
 Ref. SCH-A



**PLR195**  
**Cartridge Extractor Pliers** ..... 1 unit  
 Ref. PLR195

## Installation

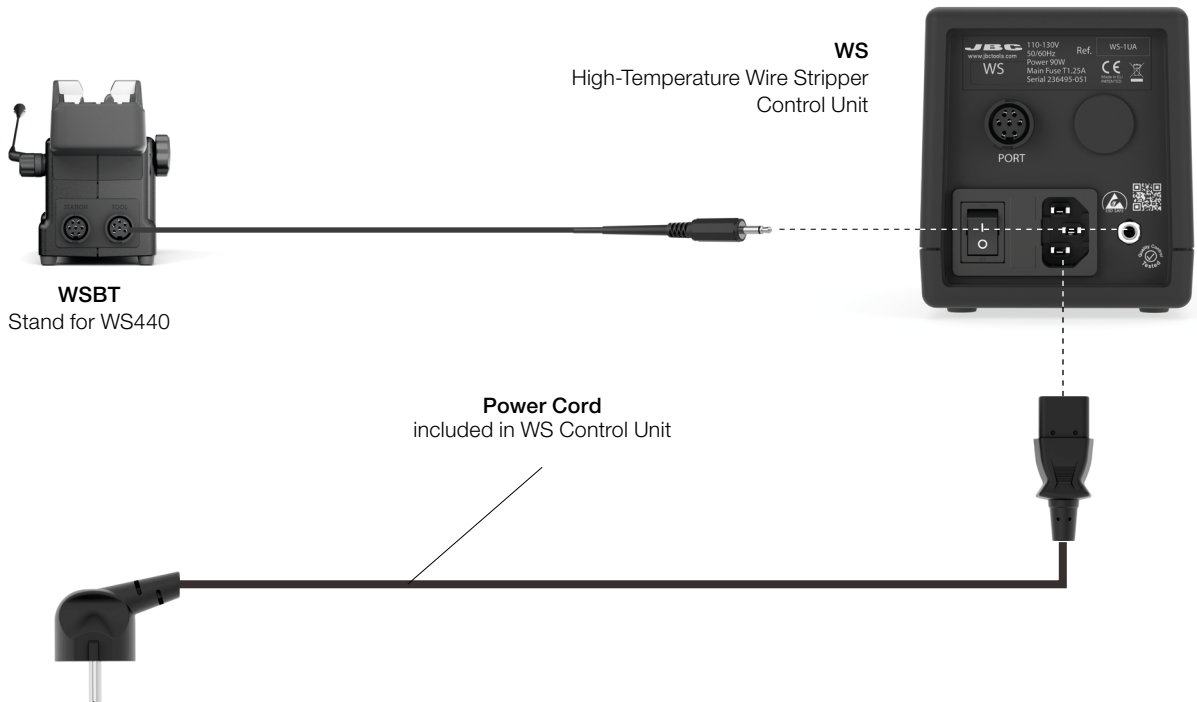

# Installation




**WS**  
High-Temperature  
Wire Stripper Control Unit



**WSBT**  
Stand for WS440

**W440**  
Cartridge Range  
*(not included)*

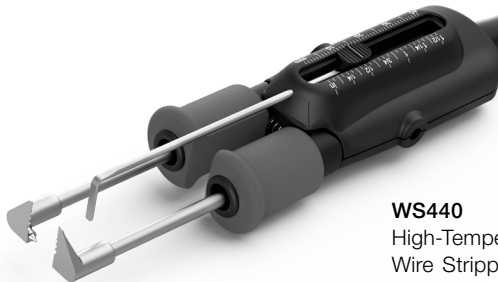

**WS440**  
High-Temperature  
Wire Stripper Tweezers

## Specifications

### WSB

#### High-Temperature Wire Stripper Station

Ref.: **WSB-9B** 100V 50/60Hz. Input Fuse: T1.6A. 5x20mm Output: 15V

Ref.: **WSB-1B** 120V 50/60Hz. Input Fuse: T1.25A. 5x20mm Output: 15V.

Ref.: **WSB-2B** 230V 50/60Hz. Input Fuse: T0.63A. 5x20mm Output: 15V.

- Package Dimensions / Weight: 387 x 352 x 190 mm / 5.48 kg  
(L x H x W) 15.24 x 13.86 x 7.48 in / 12.08 lb

Complies with CE standards.  
ESD safe.

# JBC

### Warranty

Get 2 year JBC warranty by registering here:  
<https://www.jbctools.com/productregistration/>  
within 30 days of purchase.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.