

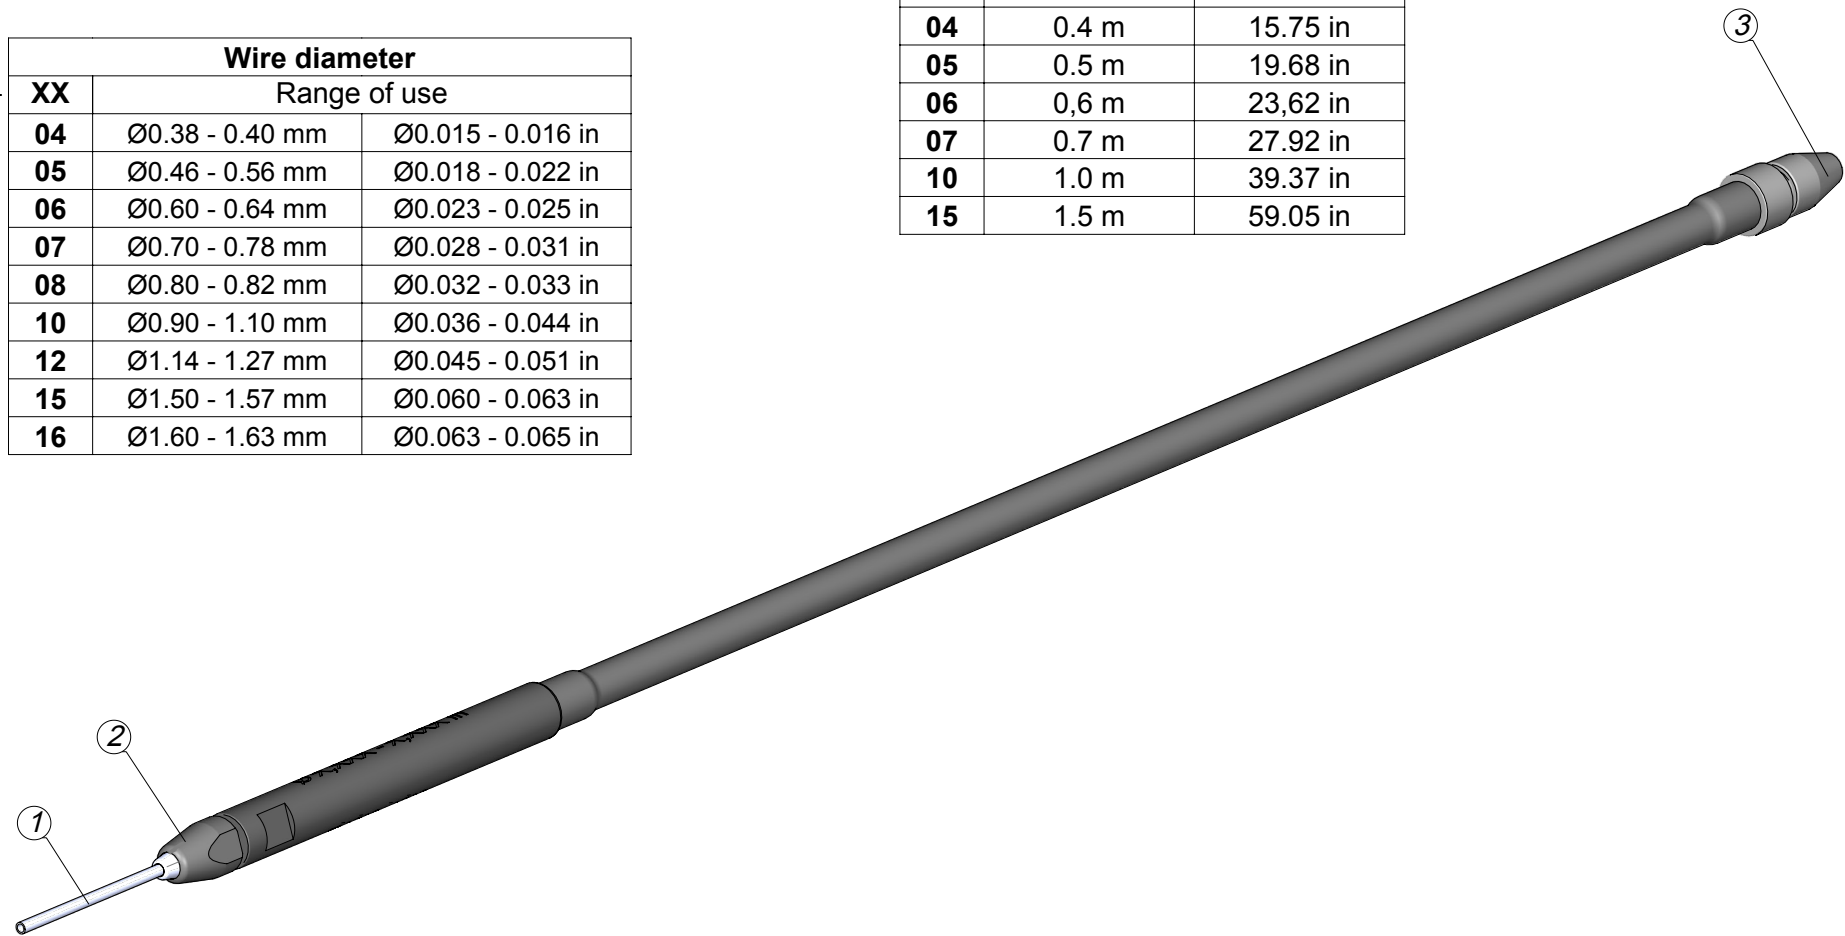
GSFR XX D LL-B





WITHOUT SOLDER WIRE PERFORATION

Guide kit Ref.	Guide tube Ref.
GSFR05X03-B	0029667
GSFR05X07-B	0029668
GSFR05X10-B	0029669
GSFR06X03-B	0029670
GSFR07X03-B	0029671
GSFR08X03-B	0029648
GSFR08X05-B	0029649
GSFR08X06-B	0029650
GSFR08X07-B	0029651
GSFR08X10-B	0029652
GSFR10X03-B	0029653
GSFR10X06-B	0029654
GSFR10X07-B	0029655
GSFR10X10-B	0029656
GSFR12X03-B	0029657
GSFR12X05-B	0030647
GSFR12X10-B	0029658
GSFR15X03-B	0029659
GSFR15X04-B	0029660
GSFR15X05-B	0029661
GSFR15X10-B	0029662
GSFR15X15-B	0029663
GSFR16X03-B	0029664
GSFR16X04-B	0029665
GSFR16X15-B	0029666

Wire diameter		
XX	Range of use	
04	Ø0.38 - 0.40 mm	Ø0.015 - 0.016 in
05	Ø0.46 - 0.56 mm	Ø0.018 - 0.022 in
06	Ø0.60 - 0.64 mm	Ø0.023 - 0.025 in
07	Ø0.70 - 0.78 mm	Ø0.028 - 0.031 in
08	Ø0.80 - 0.82 mm	Ø0.032 - 0.033 in
10	Ø0.90 - 1.10 mm	Ø0.036 - 0.044 in
12	Ø1.14 - 1.27 mm	Ø0.045 - 0.051 in
15	Ø1.50 - 1.57 mm	Ø0.060 - 0.063 in
16	Ø1.60 - 1.63 mm	Ø0.063 - 0.065 in

Tube length		
LL	Length	
03	0.3 m	11.81 in
04	0.4 m	15.75 in
05	0.5 m	19.68 in
06	0,6 m	23,62 in
07	0.7 m	27.92 in
10	1.0 m	39.37 in
15	1.5 m	59.05 in



	<i>Traction wheel Ref.</i>	<i>Support wheel Ref.</i>	<i>Inlet nozzle Ref. (for SFR-A)</i>	<i>Interm. nozzle Ref.</i>	<i>Inlet nozzle Ref. (for SFR-B)</i>	<i>Counter wheel Ref.</i>	<i>Screws Ref.</i>	<i>Threaded stud Ref.</i>	<i>Needle</i>	<i>Metal cap</i>	<i>Input tube guide</i>	
Tube length Wire ϕ												
GSFR04DLL-B	0019479	0020345	-	0030558	0030535	0026693 (Provided with SFR)	0026695 (x2)	0026696 (x3)	0029940	0029948	0029949	
GSFR05DLL-B		0019519		0030559	0030534				0029941			
GSFR06DLL-B					0030536				0029942			
GSFR07DLL-B		0019480		0023740	0030561				0030537		0029943	0029950
GSFR08DLL-B			0023741						0030562		0030538	
GSFR10DLL-B		0019481	0023736	0030563	0030539				0029945		0029951	
GSFR12DLL-B					0023855	0030564			0030540			0029946
GSFR15DLL-B									-			0030565
GSFR16DLL-B												