


# GSFR XX D LL WITHOUT SOLDER WIRE PERFORATION






Tube lenght		
LL	Lenght	
03	0,3 m	11,81 in
10	1,0 m	39,37 in

Wire diameter		
XX	Range of use	
05	∅ 0,5 - 0,6 mm	∅ 0,020 - 0,025 in
08	∅ 0,7 - 0,8 mm	∅ 0,028 - 0,032 in
10	∅ 0,9 - 1,0 mm	∅ 0,035 - 0,040 in
15	∅ 1,2 - 1,5 mm	∅ 0,047 - 0,059 in

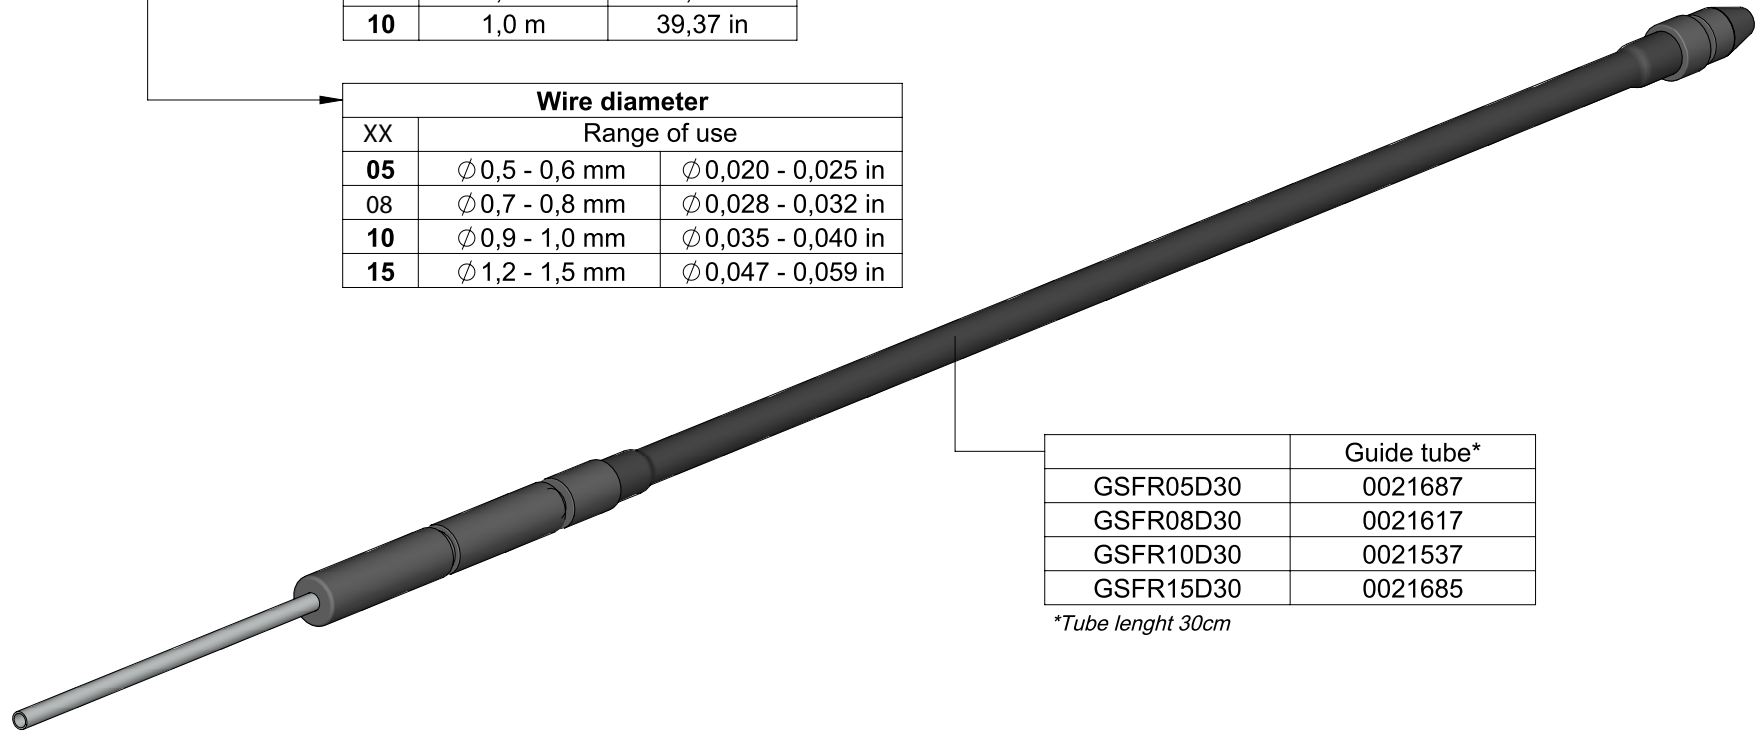

	Guide tube*
GSFR05D30	0021687
GSFR08D30	0021617
GSFR10D30	0021537
GSFR15D30	0021685

\*Tube lenght 30cm

	Outlet nozzle	Traction wheel	Support wheel	Inlet nozzle	Interm. nozzle
					
GSFR05DLL	0021560	0019479	0019519	0020962	0020963
GSFR08DLL			0019480		
GSFR10DLL	0021559		0019481	0021301	0021302
GSFR15DLL					