

Packing List

One of the following boxes are included depending on the purchased reference:

DT30

Frontal Gasket 1 box

(includes 10 gaskets)



DT35

Rearward Gasket 1 box

(includes 10 gaskets)




0033497-091024

JBC

www.jbctools.com

INSTRUCTION MANUAL



DT30 / DT35


Frontal and Rearward
Gaskets for DT530

Gasket Replacement



Be careful when manipulating the tool. The metal and glass parts may be hot.

Hold down the tool with one hand onto the stand (1) and grasp the hose at the point where it meets the protective cover and pull upward (2) to undock the solder-collector from the heating element guard.

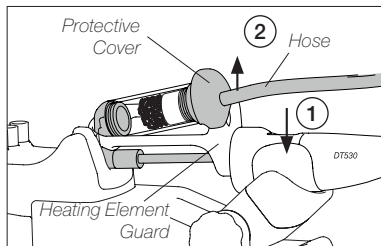

www.jbctools.com



Detach the hose connector from the solder-collector by gently pulling in opposite directions (3). If the solder-collector is too hot, use the heat-resistant gripper provided with the tool.

Remove both gaskets by pulling out as well.

Replace the worn gaskets and fit the rear gasket onto the solder-collector (4). Make sure that the rearward gasket is placed on the same side as the wool filter and the pre-filter. Press both filters against the rearward gasket using the cleaning brush (5) provided with the tool.

Fit the frontal gasket onto the solder-collector (6) and reassemble the solder collector group to the hose connector (7).

Finally reassemble the whole group to the desoldering iron.

