

JBC

www.jbctools.com

INSTRUCTION MANUAL



OB3000

WS440 Sealing Plug

This manual corresponds to the following reference:


OB3000

Packing list

The following items are included:



Sealing Plug for WS440 10 units




Instruction Manual 1 unit
Ref. 0027688

The Sealing Plug is meant to prevent undesirable flux vapors or particles from entering inside the tool.

Its usage is highly recommended for intensive applications when soldering is exposed to FOD environments or for applications where the soldering iron works close to vertical position.


 Before replacing the seal, unplug the power supply and make sure the device is not hot.

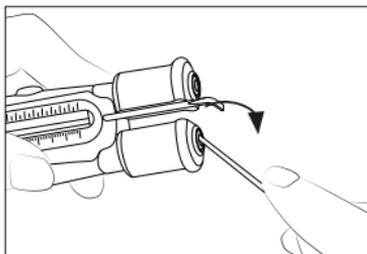

1. Removing

Enter a small shaft or screwdriver in order to gently lift and pull the sealing plug. Do not insert the tool more than 8 mm deep.

Never use a cartridge to do this operation.

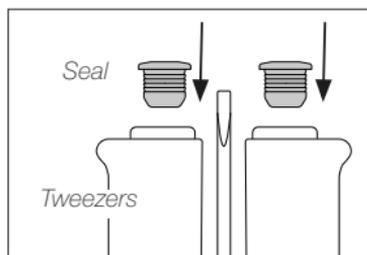

2. Mounting

Note the sealing plug mounting position:

The chamfered side has to be positioned towards the handle.



3. Inserting

Gently push the sealing plug inside the handle until it is completely into the handle. Handle and seal edges have to be aligned.

Specifications

OB3000

WS440 Sealing Plug

Ref.: **OB3000**

- Sealing Plug Dimension: 10 x 8 x 8 mm / 0.39 x 0.31 x 0.31 in
- Total Net Weight (10units): 6 g / 0.013 lb

- Package Dimensions/Weight: 92 x 55 x 41 mm / 16 g
(L x W x H) 3.62 x 2.17 x 1.61 in / 0.035 lb

Complies with CE standards.
ESD protected.

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.



www.jbctools.com