



## RMSD

### Rework System with DT530

This Plug & Play Guide corresponds to the following references:

Ref.

RMSD-9QB (100 V)  
RMSD-1QB (120 V)  
RMSD-2QB (230 V)

**Station**

More Information on the  
product web page



## Packing List

The following items are included according to purchased station reference:



**2-Tool Control Unit** ..... 1 unit  
Ref. DDE-9D (100 V)  
Ref. DDE-1D (120 V)  
Ref. DDE-2D (230 V)

**Power Hot Air Control Unit** ..... 1 unit  
Ref. JTSE-9UA (100 V)  
Ref. JTSE-1UA (120 V)  
Ref. JTSE-2UA (230 V)



**Electric Desoldering Module** ..... 1 unit  
Ref. MSE-B

**General Purpose Handle** ..... 1 unit  
Ref. T245-A  
*(Cartridge not included)*



**Pick & Place Handle** ..... 1 unit  
Ref. T260-A

**Angled Desoldering Iron** ..... 1 unit  
Ref. DT530-A



**Heater Hose Set** ..... 1 unit  
Ref. JT-T1A (100 V / 120 V)  
Ref. JT-T2A (230 V)

**JN Nozzles for JTT** ..... 3 units  
Ref. JN2012 ..... 1x  
Ref. JN2015 ..... 1x  
Ref. JN2020 ..... 1x



**Stand for T210 & T245** ..... 1 unit  
Ref. AD-SF



**Stand for DT530 Angled Desoldering Iron** ..... 2 units  
Ref. DT-SB



**Stand for JTT** ..... 1 unit  
Ref. JT-SF



**Magazine for Protectors and Extractors** ..... 1 unit  
Ref. ESHT-A



**Holder for Cartridges and Tips** ..... 1 unit  
Ref. SCH-A




**Kapton Tape** ..... 1 unit  
Ref. PH217




**Thermocouple Type K** ..... 1 unit  
Ref. PH218

## Installation

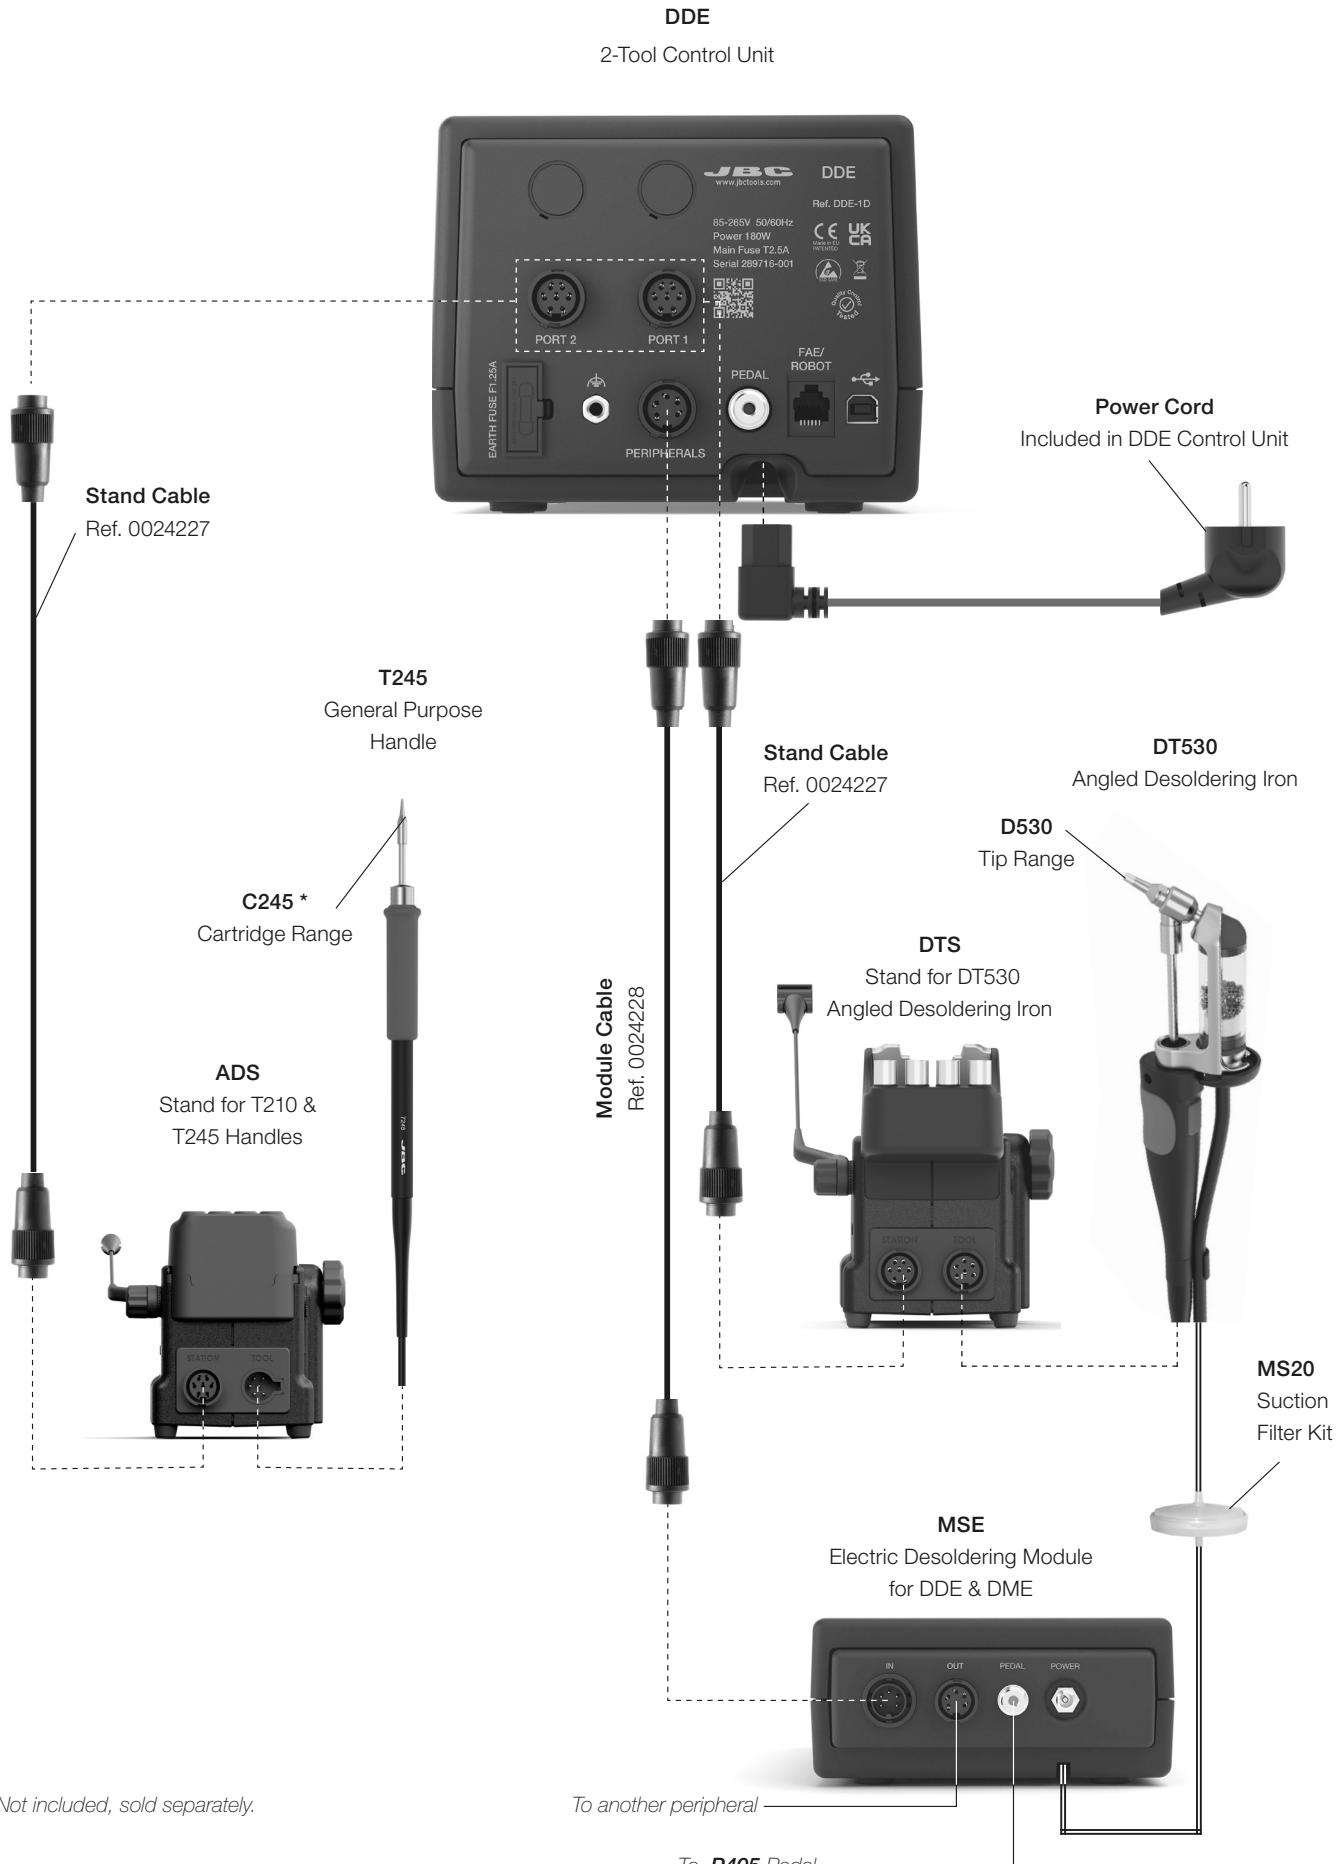

## Installation

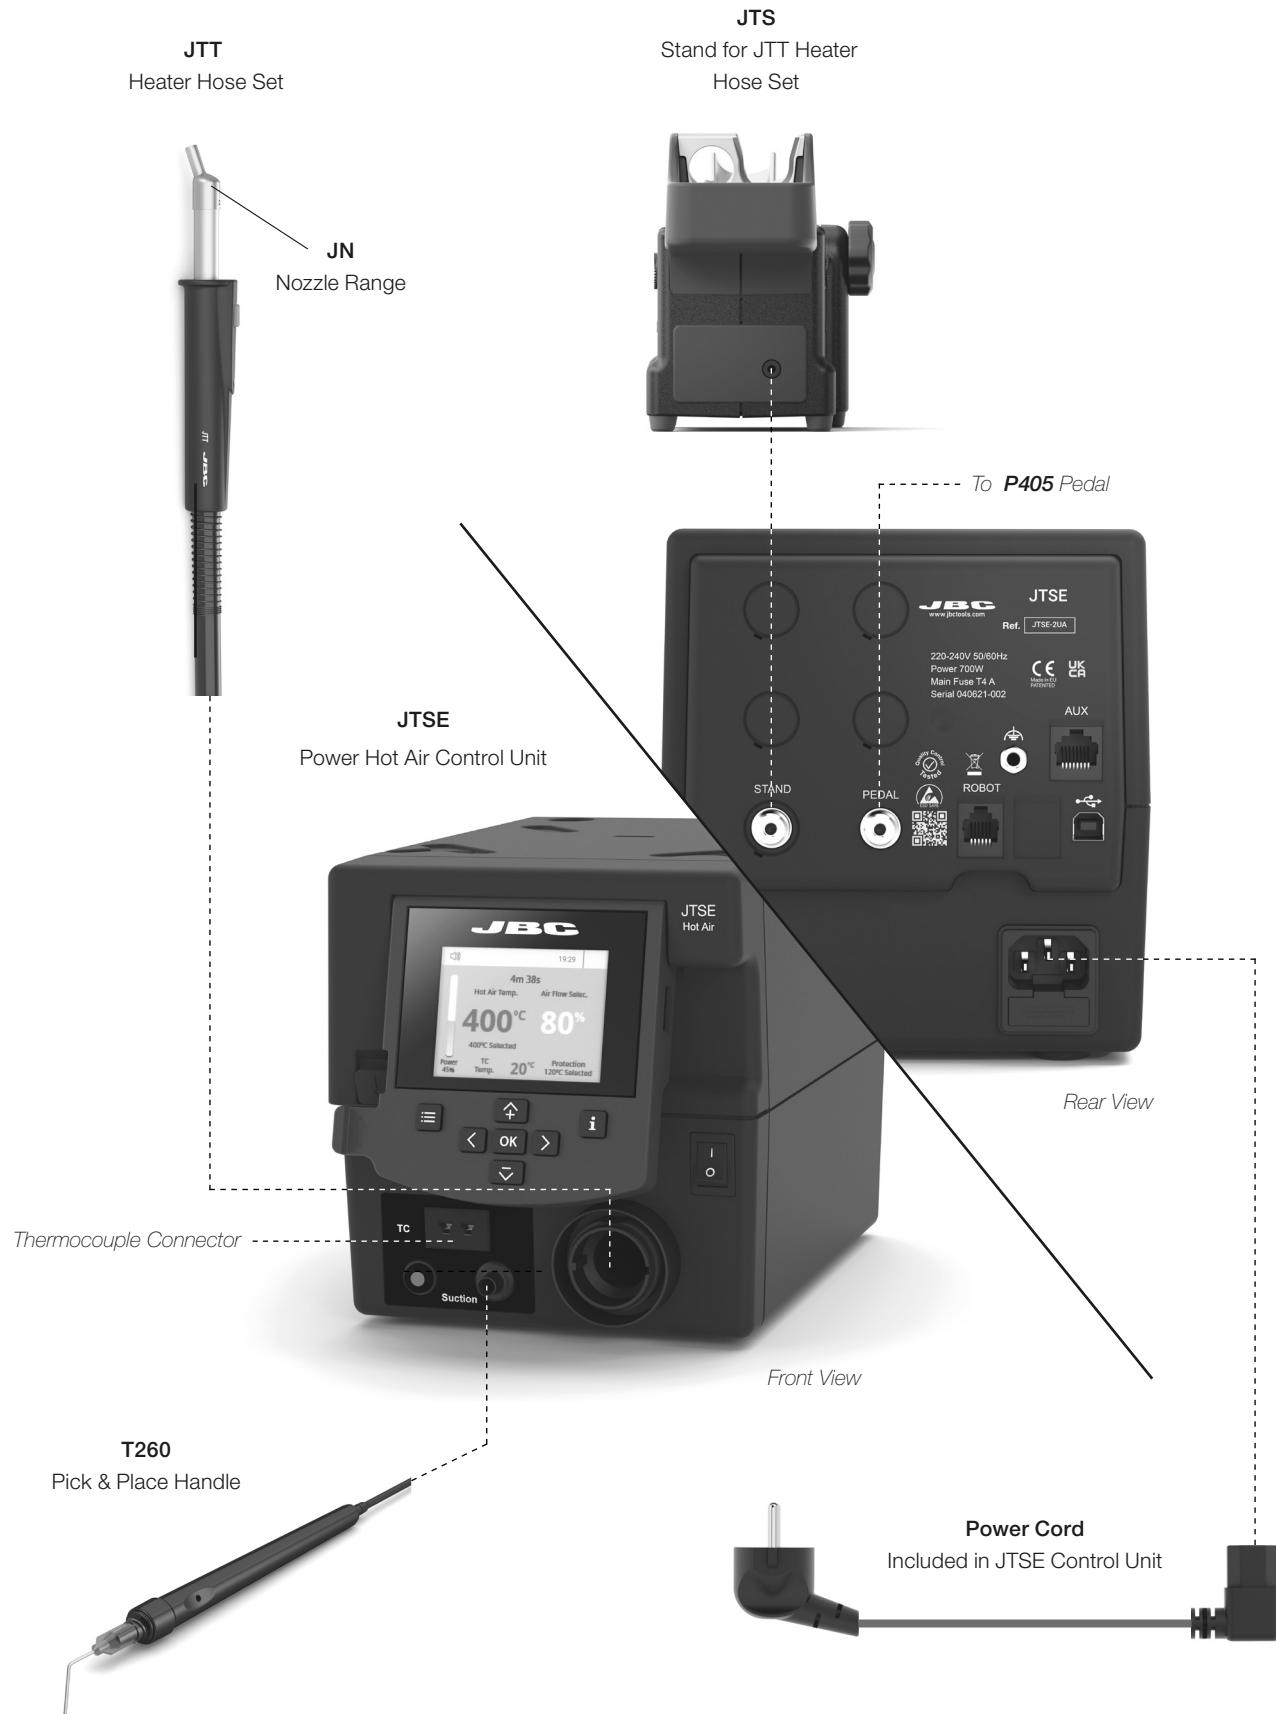

## Notes

## Notes

## Specifications

### RMSD

#### Rework System with DT530

Ref. **RMSD-9QB** (100 V)

Ref. **RMSD-1QB** (120 V)

Ref. **RMSD-2QB** (230 V)

- Package Dimensions / Weight:

(L x H x W)

615 x 368 x 637 mm / 17.49 kg

24.21 x 14.49 x 25.08 in / 38.57 lb

Complies with CE standards.

ESD safe.

**JBC**

### Warranty

Information regarding the warranty of each product can be found on the final page of its instruction manual.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.

[www.jbctools.com](http://www.jbctools.com)

0036931-171225